




**OUTLAND  
TECHNOLOGY  
INC.**

0010550C

# UNDERWATER LIGHTS MODEL UWL-100 & 200

UNDERWATER CAMERA OR WORK LIGHTS

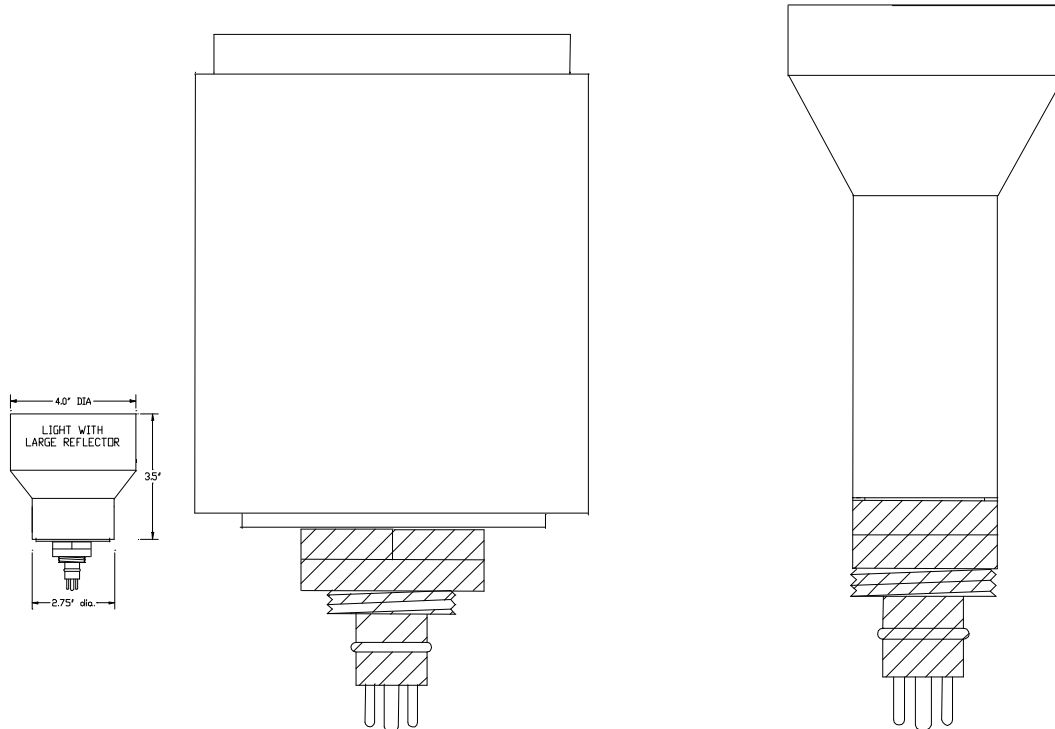

**MODEL#**

**UWL-100**

**UWL-200**

**MECHANICAL:**

- |                      |                             |                              |
|----------------------|-----------------------------|------------------------------|
| 1. Diameter.....     | 2.375 (60mm)                | 1in to 1.6 in. max.(25-40mm) |
| 2. Length.....       | 3.25 in (81mm)              | 3.0 in. (75mm)               |
|                      | (excluding connector)       |                              |
| 3. Weight.....       | (Dry) 1 lb. (.45kg)         | 10.5 oz. (.3kg)              |
|                      | (Wet) .8 lb.(.36kg)         | 8 oz.(.23kg)                 |
| 4. Depth Rating..... | 3300 ft. (1000m)            | 3300 ft. (1000m)             |
| 5. Housing.....      | Anodized AL.                | 17-4, Stainless              |
| 6. Port/Globe.....   | Pyrex                       | Borosilicate Glass           |
| 7. Connector.....    | SEM3P-S4                    | GRE3P-S4                     |
|                      | Mating Connector.. RMG-3-FS | RMG-3-FS                     |

**ELECTRICAL:**

- |                 |                  |                  |
|-----------------|------------------|------------------|
| 1. Voltage..... | up to 120 V Max. | up to 120 V Max. |
| 2. Wattage..... | 250 max.         | 150 Max.         |
| 3. Bulb.....    | Std. Q250cl/mc   | std. Q150cl/mc   |

**OPTIONS:**

- |                   |                        |                |
|-------------------|------------------------|----------------|
| 1. Reflector..... | Wide angle or Standard | NA             |
| 2. Bulbs.....     | 75 to 250 watt         | 75 to 150 watt |

(Specifications subject to change without notice.)

**NOTE:** Outland recommends the use of an Isolation transformer or Ground Fault Interrupter (GFI), with lamps above 30 Volts.